
C-Pro Grey

AUX-09/12CPRO

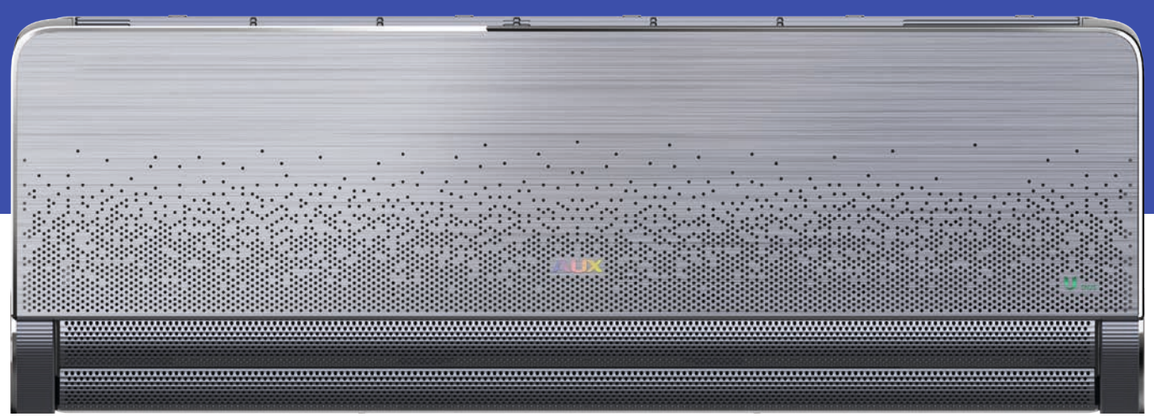

The C-Pro Grey air conditioners are equipped with innovative air ventilation technology, providing an unparalleled level of user comfort

The air conditioners from the C-Pro series stand out for their exceptional craftsmanship and modern aesthetics, making them a perfect fit for various interior designs. Their elegant design serves as a subtle and sophisticated decorative element. Thanks to the innovative air distribution technology through 8645 micro-holes, users can enjoy an exceptional level of comfort.

R32 | A+++ COOLING | A++ HEATING | AIR CONDITIONER 5 YEARS OF WARRANTY | COMPRESSOR 10 YEARS OF WARRANTY



HEALTH

- Sterilisation 57°C
- Self-cleaning mode
- Temperature range setting
- In-built humidity sensor
- Anti-mould mode
- Washable air filter*

ECOLOGY

- R32 Refrigerant
- Eco mode
- Stand-by mode 0,3W

CONVENIENCE

- Auto-diagnosis mode
- 24H timer
- LED display
- In-built Wi-Fi module
- Wireless controller
- Heating at -25°C

COMFORT

- Micro-breeze function
- Triple deflector function
- 4D Airflow
- Vertical movement of the air louvers
- Horizontal movement of the air louvers
- Anti-Cold-Air mode

COMFORT

- Night mode
- I FEEL mode
- Turbo mode
- Auto mode
- Cooling mode
- Heating mode
- 8°C heating mode
- Dehumidification mode
- Fan mode
- Quiet operation mode
- Child-lock mode

TECHNOLOGY

- Inverter technology
- Drip tray heater of the outdoor unit
- Intelligent defrosting
- Fire-resistant electrical box
- Gold-coated outdoor unit fins
- Gold-coated indoor unit fins
- Hydrophilic aluminium blades
- Super EMC
- Automatic restart

*depending on the model



C-Pro Grey

CPRO Series

AUX-09/12CPRO



Model			AUX-09CPRO	AUX-12CPRO
Cooling efficiency		[kW]	2,7 (0,6-4,0)	3,5 (0,65-4,10)
Heating efficiency		[kW]	3,40 (0,80 - 4,20)	4,2 (0,93-4,20)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1
Operating current	Cooling	[A]	3,20 (0,56 - 5,32)	4,20 (0,56 - 5,80)
	Heating	[A]	3,70 (1,02 - 5,32)	4,80 (1,50 - 8,00)
Energy consumption	Cooling	[W]	640 (100 - 1200)	870 (130 - 1550)
	Heating	[W]	720 (200 - 1200)	1060 (230 - 1300)
Maximum current draw		[A]	8,9	8,9
Maximum power consumption		[W]	1600	1600
SEER / SCOP		-	9,00 / 4,70	8,80 / 4,70
Energy efficiency class	Cooling	-	A+++	A+++
	Heating	-	A++	A++
Indoor unit			**AUX-09CPRO/I**	**AUX-12CPRO/I**
Airflow rate		[m^3/h]	650	650
Sound pressure level		[dB(A)]	40/36/34/32/30/29/23	40/36/34/32/30/29/23
Sound power level		[dB(A)]	54	54
Dimensions of the indoor unit		[mm]	890 x 311 x 212	890 x 311 x 212
Weight of the indoor unit		[kg]	9,5	9,5
Outdoor unit			**AUX-09CPRO/O**	**AUX-12CPRO/O**
Refrigerant gas	Type	-	R32	R32
	Factory charge (up to 5m)	[g]	600	600
	Additional charge	[g/m]	20	20
Sound pressure level (max/silent)		[dB(A)]	51/45	51/45
Sound power level		[dB(A)]	61	62
Dimensions of the outdoor unit		[mm]	705 x 279 x 530	705 x 279 x 530
Weight of the outdoor unit		[kg]	24,5	24,5
Operation of the ODU (outside temp.)	Cooling	[°C]	-15~49°C	-15~49°C
	Heating	[°C]	-25~32°C	-25~32°C
Pipe connections (diameter)	Liquid	[inches]	1/4	1/4
	Gas	[inches]	3/8	3/8
Maximum piping length		[m]	20	20
Maximum height difference		[m]	10	10



Wireless controller Type C

Air conditioning units contain fluorinated greenhouse gases R32.

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.