C-Smart Premium White

AUX-09/12CA
AUX-18/24C3A



The C-Smart Premium series combines the latest trends with a wide range of features that will appeal to even the most demanding users

The combination of excellent production precision and aesthetics in the C-Smart Premium air conditioners, along with their elegant design, not only guarantees a perfect fit for various interior arrangements but also serves as a refined and subtle decorative detail.

R32 · UV · A+++ COOLING · A++ HEATING · AIR CONDITIONER 5 YEARS OF WARRANTY · COMPRESSOR 10 YEARS OF WARRANTY



HEALTH

- UV Sterilisation
- 57°C Sterilisation
- Self-cleaning mode
- Antibacterial filter*
- Temperature range setting
- PM 2.5 filter*
- Additional air filter*
- Anti-mould mode
- Washable air filter*

ECOLOGY

- R32 Refrigerant
- Eco mode
- Stand-by mode 0,3W

CONVENIENCE

- Auto-diagnosis mode
- 24H timer
- LED display
- Dual condensation drainage
- In-built Wi-Fi module
- Wireless controller
- Heating at -30°C

COMFORT

- Micro-breeze function
- 4D Airflow
- Vertical movement of the air louvers
- Horizontal movement of the air louvers
- Anti-Cold-Air mode

COMFORT

- Night mode
- I FEEL mode
- Turbo mode
- Auto mode
- Cooling mode
- Heating mode
- 8°C heating mode
- Dehumidification mode
- Fan mode
- Quiet operation mode
- Easy and quick installation

TECHNOLOGY

- Inverter technology
- Drip tray heater of the outdoor unit
- Intelligent defrosting
- Fire-resistant electrical box
- Gold-coated outdoor unit fins
- Gold-coated indoor unit fins
- Hydrophilic aluminium blades
- Super EMC
- Automatic restart
- BMS**

*depending on the model
**optionally available depending on the model



C-Smart Premium White

CA / C3A Series

AUX-09/12CA, AUX-18/24C3A



Model			AUX-09CA	AUX-12CA	AUX-18C3A	AUX-24C3A
Cooling efficiency		[kW]	2,70 (0,60 - 4,00)	3,50 (0,65 - 4,10)	5,40 (1,30 - 5,90)	7,30 (1,80 - 7,40)
Heating efficiency		[kW]	3,30 (0,80 - 4,20)	4,20 (0,93 - 4,20)	5,80 (1,30 - 6,10)	7,40 (1,80 - 8,00)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Operating current	Cooling	[A]	3,30 (0,56 - 5,32)	4,20 (0,56 - 5,80)	6,40 (2,20 - 6,80)	7,90 (1,00 - 10,00)
	Heating	[A]	3,90 (1,02 - 5,32)	4,80 (1,00 - 6,30)	6,10 (2,00 - 8,00)	10,50 (1,00 - 11,00)
Energy consumption	Cooling	[W]	720 (100 - 1200)	870 (130 - 1550)	1430 (290 - 1950)	1700 (230 - 2300)
	Heating	[W]	800 (200 - 1200)	1060 (230 - 1300)	1330 (250 - 1800)	2300 (230 - 2530)
Maximum current draw		[A]	9,0	9,0	12,0	16,0
Maximum power consumption		[W]	1600	1500	2400	3200
SEER / SCOP		-	8,50 / 4,60	8,50 / 4,60	8,80 / 4,60	8,70 / 4,60
Energy efficiency class	Cooling	-	A+++	A+++	A+++	A+++
	Heating	-	A++	A++	A++	A++
Indoor unit			**AUX-09CA/I**	**AUX-12CA/I**	**AUX-18C3A/I**	**AUX-24C3A/I**
Airflow rate		[m^3/h]	600	650	1000	1300
Sound power level		[dB(A)]	54	56	56	62
Sound pressure level		[dB(A)]	41/37/36/34/32/30/19	43/38/36/34/32/31/20	44/40/37/35/33/31/21	50/46/43/39/36/33/22
Dimensions of the indoor unit		[mm]	776x298x202	834x298x202	1145x332x230	1145x332x230
Weight of the indoor unit		[kg]	8,0	8,5	13,0	14,0
Outdoor unit			**AUX-09CA/O**	**AUX-12CA/O**	**AUX-18C3A/O**	**AUX-24C3A/O**
Refrigerant gas	Type	-	R32	R32	R32	R32
	Factory charge (up to 5m)	[g]	550	600	1030	1200
	Additional charge	[g/m]	20	20	20	30
Sound power level		[dB(A)]	61	62	63	65
Sound pressure level (max/silent)		[dB(A)]	51/45	51/45	53/47	56/50
Dimensions of the outdoor unit		[mm]	708x530x258	708x530x258	785x548x281	890x695x319
Weight of the outdoor unit		[kg]	22,5	24,5	28,5	41,0
Operation of the ODU (outside temp.)	Cooling	[°C]	-15~53°C	-15~53°C	-15~53°C	-15~53°C
	Heating	[°C]	-30~32°C	-30~32°C	-30~32°C	-30~32°C
Pipe connections (diameter)	Liquid	[inches]	1/4	1/4	1/4	1/4
	Gas	[inches]	3/8	3/8	1/2	5/8
Maximum piping length		[m]	20	20	25	25
Maximum height difference		[m]	10	10	10	15

R32 | A+++ COOLING | A++ HEATING | AIR CONDITIONER 5 YEARS OF WARRANTY | COMPRESSOR 10 YEARS OF WARRANTY




Wireless controller Type C

Air conditioning units contain fluorinated greenhouse gases R32.

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.

C-Smart

AUX-07/09/12/18/24CA

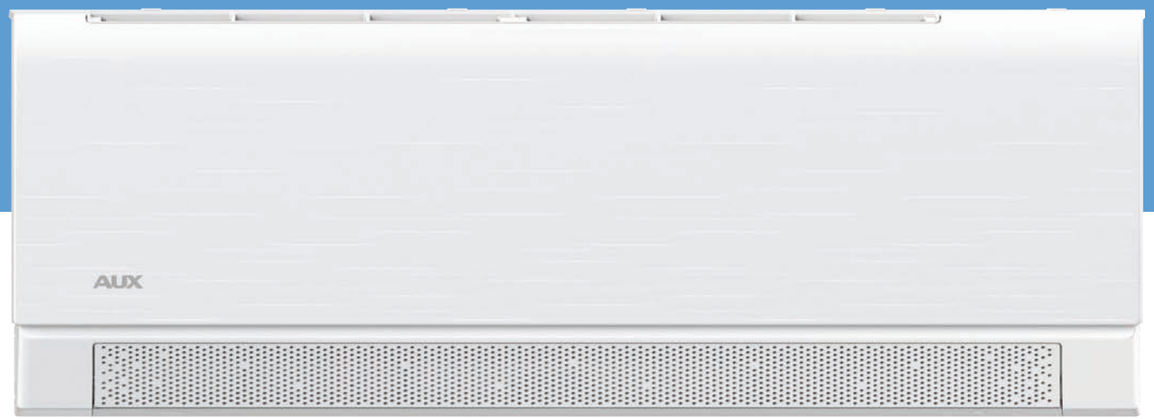

The C-Smart series is a perfect combination of contemporary design and innovative features, created with comfort, elegance, and a unique aesthetic in mind

The air conditioners in the C-Smart series are equipped with an advanced air distribution system, thanks to innovative micro-hole technology. Combined with a range of innovative features and exceptional design, C-Smart air conditioners are a perfect decorative element that enhances the style of modern interiors.



C-Smart

CA Series

AUX-07/09/12/18/24CA



Model			AUX-07CA/I	AUX-09CA/I	AUX-12CA/I	AUX-18CA/I	AUX-24CA/I
Cooling efficiency		[kW]	2,05 (1,13 - 2,70)	2,64 (1,40 - 3,30)	3,52 (1,70 - 3,70)	5,27 (2,50 - 5,80)	6,90 (2,90 - 7,30)
		[Btu/h]	7000 (3855 - 9220)	9000 (4780 - 11260)	12000 (5800 - 12625)	17980 (8530 - 19790)	23542 (9895 - 24908)
Heating efficiency		[kW]	2,35 (0,98 - 2,50)	2,93 (1,20 - 3,00)	3,81 (2,03 - 4,42)	5,38 (2,25 - 5,80)	7,05 (2,10 - 8,00)
		[Btu/h]	8000 (3340 - 8530)	10000 (4095 - 10240)	13000 (6930 - 15080)	18350 (7680 - 19790)	24054 (7165 - 27296)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power consumption in cooling mode		[W]	40 (12-68)	40 (12-68)	40 (12-68)	63 (16-88)	63 (16-88)
Power consumption in heating mode		[W]	40 (12-68)	40 (12-68)	40 (12-68)	63 (16-88)	63 (16-88)
Fan motor power		[W]	13	13	13	30	50
Fan speed		[rpm]	1180 - 850	1180 - 850	1180 - 850	1230 - 850	1330 - 900
Airflow rate		[m3/h]	650	650	650	950	1300
Sound pressure level		[dB(A)]	41/38/35	41/38/35	41/38/35	47/39/36	49/44/40
Sound power level		[dB(A)]	53	53	53	58	63
Unit dimensions		[mm]	774 x 298 x 202	774 x 298 x 202	774 x 298 x 202	1002 x 318 x 223	1145 x 332 x 230
Weight of the unit (net)		[kg]	7,0	7,0	7,5	11,0	13,0
Refrigerant gas		-	R32	R32	R32	R32	R32
Pipe connections (diameter)	**Liquid**	[mm(inch)]	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)
	Gas	[mm(inch)]	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)
	Condensate	[mm]	16,9	16,9	16,9	16,9	16,9

HEALTH



UV Sterilisation · Antibacterial filter · Temperature range setting · PM2.5 filter · Additional air filter · Anti-mould mode · Washable air filter

ECOLOGY



R32 Refrigerant · Eco mode · Stand-by mode 0,3W

COMFORT



Micro-breeze function · 4D Airflow · Vertical movement of the air louvers · Horizontal movement of the air louvers · Anti-Cold-Air mode · Night mode · I FEEL mode · Turbo mode · Auto mode · Cooling mode · Heating mode · Dehumidification mode

COMFORT



Fan mode · Quiet operation mode · Easy and quick installation

TECHNOLOGY



Inverter technology · Intelligent defrosting · Hydrophilic aluminium blades · Super EMC · Automatic restart · Gold-coated indoor unit fins

CONVENIENCE



Auto-diagnosis mode · 24H timer · LED display

CONVENIENCE



Dual condensation drainage · In-built Wi-Fi module · Wireless controller

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.