
Console units

AUX-M-K(09/12/16/18)

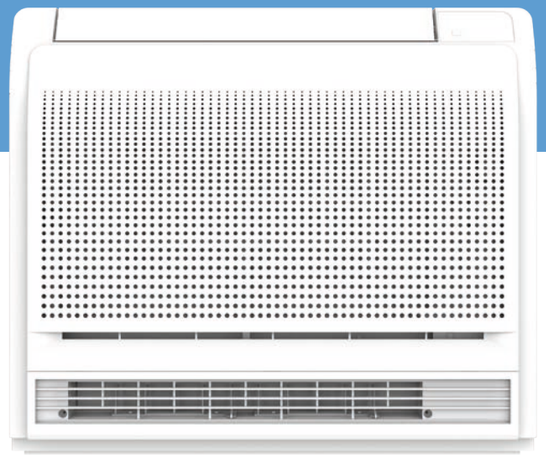


Console units are efficient and compact devices that are perfect for both commercial and residential spaces. With their attractive design, they will fit perfectly into the air-conditioned room.

R32 | DC INVERTER | Long-term | AIR CONDITIONER 5 YEARS OF WARRANTY

MULTI SPLIT SYSTEMS

High heating capacity

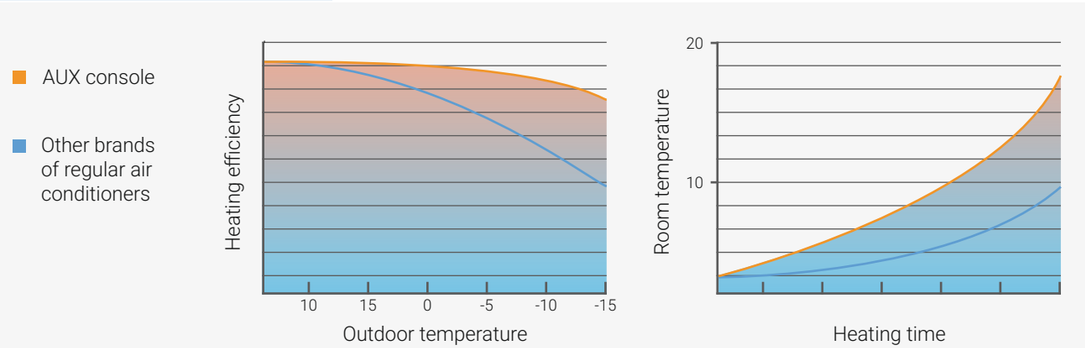

Highest quality compressor

Both indoor and outdoor units utilise advanced DC inverter technology, which is characterised by high efficiency and energy savings. As a result, these systems operate more efficiently, contributing to a significant reduction in energy consumption. Inverter technology allows for smooth adjustment of the devices' power to current needs, eliminating energy losses caused by frequent on/off cycles. Furthermore, DC inverters increase the lifespan of the units by reducing mechanical and thermal stresses. As a result, users can enjoy lower energy bills and more reliable performance of their systems.

CONSOLE UNITS






Console

K Series

AUX-M-K(09/12/16/18)



Model			AUX-M-K09	AUX-M-K12	AUX-M-K16/AUX-M-K18
Cooling efficiency		[kW]	2,60 (1,50 - 3,55)	3,50 (1,70 - 3,70)	4,70 (2,50 - 4,80)
		[Btu/h]	8872 (5120 - 12115)	12285 (5800 - 12625)	16036 (8530 - 16378)
Heating efficiency		[kW]	2,80 (1,50 - 3,55)	3,50 (1,50 - 3,70)	5,00 (2,50 - 5,60)
		[Btu/h]	9560 (5120 - 12115)	12625 (5120 - 12625)	17060 (8530 - 19107)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power consumption in cooling mode		[W]	40 (20 - 65)	40 (20 - 65)	55 (20 - 80)
Power consumption in heating mode		[W]	40 (20 - 65)	40 (20 - 65)	55 (20 - 80)
Fan motor power		[W]	35	35	35
Fan speed		[rpm]	650	650	650
Airflow rate		[m3/h]	600/530/430	600/530/430	650/550/450
Sound pressure level		[dB(A)]	42/39/36	42/39/36	44/40/37
Sound power level		[dB(A)]	52	52	54
Unit dimensions		[mm]	700 x 225 x 600	700 x 225 x 600	700 x 225 x 600
Weight of the unit (net)		[kg]	15,0	15,0	15,0
Refrigerant gas		-	R32	R32	R32
Pipe connections (diameter)	**Liquid**	[mm(inch)]	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)
	Gas	[mm(inch)]	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)
	Condensate	[mm]	20	20	20

HEALTH



Washable air filter



Durable air filter

ECOLOGY



R32 Refrigerant

CONVENIENCE



Wireless controller



24H timer



In-built Wi-Fi module



Optional wired controller

COMFORT



Cooling mode



Heating mode



Auto mode



Fan mode

COMFORT



Dehumidification mode



Vertical movement of the air louvers



Anti-Cold-Air mode



Night mode



I FEEL mode



Turbo mode

TECHNOLOGY



Inverter technology



Intelligent defrosting



Hydrophilic aluminium blades




Automatic restart



Super EMC



Cooling in low temperatures



Installation of the unit vertically against the wall

Easy installation and flat design

The design of the console unit allows for easy arrangement of the device in the room. Installing the unit against the wall does not require any casing. The exceptionally shallow depth of the unit – only 225 mm – enables installation even in limited spaces.

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.