
Cassette units

AUX-M-C(09/12/18/24)/I



The quiet and efficient AUX cassette units are perfect for commercial spaces with suspended ceilings, such as offices, conference rooms, restaurants, and retail outlets. Thanks to the 360° perimeter airflow technology and the quick cooling/heating function, they can ensure comfortable conditions in every corner of the air-conditioned room.



Cassette

C Series

AUX-M-C(09/12/18/24)/I



Model			AUX-M-C09 AUX-C-09CAC	AUX-M-C12	AUX-M-C18	AUX-M-C24
Decorative panel		-	AUX-P-01	AUX-P-01	AUX-P-01	AUX-P-02
Cooling efficiency		[kW]	2,80 (1,50 - 3,55)	3,52 (1,70 - 3,70)	5,28 (2,50 - 5,60)	7,00 (2,16 - 8,20)
		[Btu/h]	9560 (5120 - 12115)	12010 (5800 - 12625)	18015 (8530 - 19107)	24000 (7400 - 28000)
Heating efficiency		[kW]	3,00 (1,60 - 3,81)	3,81 (2,03 - 4,42)	5,60 (3,03 - 7,03)	8,00 (1,98 - 9,30)
		[Btu/h]	10240 (5460 - 13000)	13000 (6930 - 15080)	19107 (10340 - 24000)	27300 (6800 - 31700)
Power supply		[V~,Hz,Ph]	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1	220-240, 50, 1
Power consumption in cooling mode		[W]	40 (12 - 68)	40 (12 - 68)	40 (12 - 68)	110 (27,5 - 171)
Power consumption in heating mode		[W]	40 (12 - 68)	40 (12 - 68)	40 (12 - 68)	110 (27,5 - 171)
Fan motor power		[W]	30	30	30	80
Fan speed (high / medium / low)		[rpm]	720/610/530	720/610/530	840/720/660	580/530/470
Airflow rate (high / medium / low)		[m3/h]	700/620/530	700/620/530	760/650/580	1400/1350/1150
Sound pressure level		[dB(A)]	42/36/32	42/36/32	45/40/38	47/45/42
Sound power level		[dB(A)]	52	52	56	57
Unit dimensions		[mm]	570 x 570 x 260	570 x 570 x 260	570 x 570 x 260	840 x 840 x 246
Panel dimensions		[mm]	650 x 650 x 55	650 x 650 x 55	650 x 650 x 55	950 x 950 x 55
Weight of the unit (net)		[kg]	14,5	14,5	15,0	26,0
Weight of the panel (net)		[kg]	2,2	2,2	2,2	5,3
Refrigerant gas		-	R32	R32	R32	R32
Pipe connections (diameter)	**Liquid**	[mm(inch)]	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)
	Gas	[mm(inch)]	12,70 (1/2)	12,70 (1/2)	12,70 (1/2)	15,88 (5/8)
	Condensate	[mm]	20	20	20	20

HEALTH

Washable air filter

ECOLOGY

R32 Refrigerant

CONVENIENCE

Wireless controller

24H timer

Optional Wi-Fi module

COMFORT

Cooling mode

Heating mode

Auto mode

Fan mode

Dehumidification mode

COMFORT

Vertical movement of the air louvers

Anti-Cold-Air mode

Night mode

I FEEL mode

Turbo mode

TECHNOLOGY

Inverter technology

Intelligent defrosting

Hydrophilic aluminium blades

Automatic restart

Super EMC

Cooling in low temperatures


We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.


Dimensional drawings


MULTI Indoor units

Cassette units


AUX-M-C09/I AUX-C-09CAC AUX-M-C12/I AUX-M-C18/I









AUX-M-C24/I

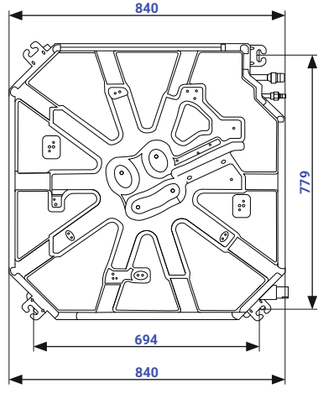







We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.


MULTI Indoor units

Ducted units


AUX-M-D07/I AUX-M-D09/I








AUX-M-D12/I

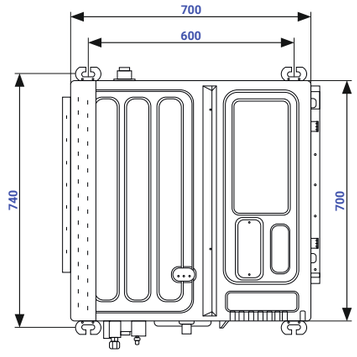

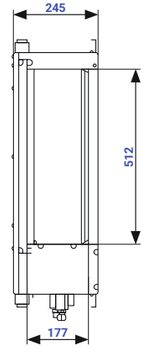

We reserve the right to errors in descriptions, appearance, functions, technical parameters, and dimensional drawings resulting from the continuous improvement of our devices.