
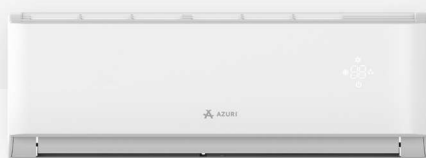


NORA PREMIUM

STANDARDNO UKLJUČENO

- Wi-Fi sučelje
- Led display
- 7 brzina ventilatora
- I-Feel funkcija
- Cold Plasma filter za ioniziranje zraka
- Inteligentno predzagrijavanje i odmrzavanje
- Samodijagnoza



MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WA25VH/I	2500	2800	6,5/4,1 (A++/A+)	270/714/195
AZI-WA25VH/O	(500 - 3250)	(500 - 3500)		550/732/330
AZI-WA35VH/I	3200	3400	6,1/4,0 (A++/A+)	275/790/200
AZI-WA35VH/O	(900 - 3600)	(900 - 4000)		550/732/330
AZI-WA50VH/I	4600	5200	6,4/4,0 (A++/A+)	300/970/224
AZI-WA50VH/O	(1000 - 5300)	(1000 - 5650)		555/732/330

CJEVOVOD	UČINAK (kW)		
	2,5	3,2	4,6
Max. visinska razlika [m]	10	10	10
Max. duljina instalacije [m]	15	15	25
Promjer cijevi tekuće faze [mm]	6,35	6,35	6,35
Promjer cijevi plinovite faze [mm]	9,52	9,52	9,52

MIDORI

STANDARDNO UKLJUČENO

- Noćni način rada (3 noćne krivulje)
- I-Feel funkcija
- Cold Plasma filter za ioniziranje zraka
- Inteligentno predzagrijavanje i odmrzavanje
- Samodijagnoza



MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WN20VA/I	2200	2400	6,6/4,0 (A++/A+)	260/708/185
AZI-WN20VA/O	(300 - 2850)	(600 - 2900)		450/710/293
AZI-WN25VA/I	2500	2800	6,6/4,1 (A++/A+)	260/708/185
AZI-WN25VA/O	(500 - 3250)	(500 - 3700)		555/732/330
AZI-WN35VA/I	3200	3400	6,1/4,0 (A++/A+)	260/783/185
AZI-WN35VA/O	(900 - 3600)	(900 - 4000)		555/732/330
AZI-WN50VA/I	4600	5200	7,2/4,0 (A++/A+)	333/943/246
AZI-WN50VA/O	(1000 - 5400)	(750 - 5800)		555/732/330
AZI-WN70VA/I	6200	6500	6,8/4,0 (A++/A+)	333/943/246
AZI-WN70VA/O	(1800 - 6900)	(1300 - 7910)		555/873/376

CJEVOVOD	UČINAK (kW)				
	2,2	2,5	3,2	4,6	6,2
Max. visinska razlika [m]	10	10	10	10	10
Max. duljina instalacije [m]	15	15	20	25	25
Promjer cijevi tekuće faze [mm]	6,35	6,35	6,35	6,35	6,35
Promjer cijevi plinovite faze [mm]	9,52	9,52	9,52	9,52	12,7