



MULTI-SPLIT VANJSKE JEDINICE

DC INVERTER (R32)

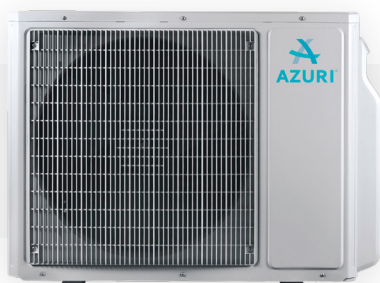


MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-OR40VC/O	4100 (2050-5000)	4400 (2490-5400)	7,2/4,2 A++/A+	550/822/352
AZI-OR50VC/O	5300 (2140-5800)	5650 (2580-6500)	7,2/4,2 A++/A+	550/822/352

MOGUĆNOST SPAJANJA DO 2 UNUTARNJE JEDINICE

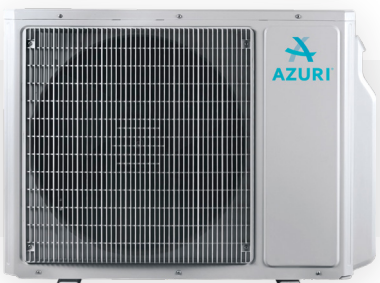


MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-OR60VC/O	6100 (2200 - 8300)	6500 (2700 - 8500)	7,8/4,3 (A++/A+)	660/964/402
AZI-OR70VC/O	7100 (2300 - 9200)	8600 (2800 - 9200)	7,1/4,3 (A++/A+)	660/964/402

MOGUĆNOST SPAJANJA DO 3 UNUTARNJE JEDINICE

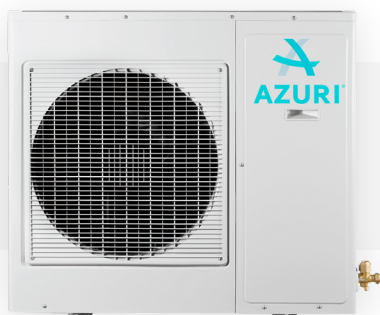

MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-OR80VC/O	8000 (2300 - 11 000)	9500 (2800 - 10250)	7,2/4,2 (A++/A+)	660/964/402
AZI-OR100VC/O	10600 (2600-12000)	12000 (3000-14000)	7,2/4,0 (A++/A+)	826/1020/427

MOGUĆNOST SPAJANJA DO 4 UNUTARNJE JEDINICE

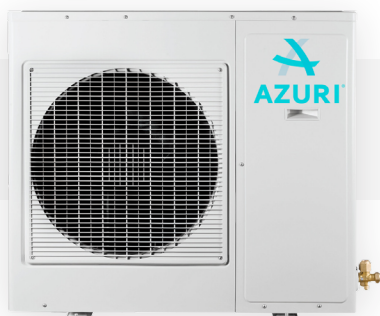

MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-OR120VC/O	12100 (2600-15200)	13000 (3000-15500)	7,2/4,0 (A++/A+)	826/1020/427

MOGUĆNOST SPAJANJA DO 5 UNUTARNJIH JEDINICA


 -22°C ~ 24°C
 -15°C ~ 43°C

CJEVOVOD	UČINAK (kW)						
	4,1	5,2	6,1	7,1	8,0	10,6	12,1
Max. visinska razlika [m]	15	15	15	15	15	25	25
Max. duljina instalacije [m]	40	40	60	60	70	80	100
Promjer cijevi tekuće faze [mm]	2 x Ø6,35	2 x Ø6,35	3 x Ø6,35	3 x Ø6,35	4 x Ø6,35	4 x Ø6,35	5 x Ø6,35
Promjer cijevi plinovite faze [mm]	2 x Ø9,52	2 x Ø9,52	3 x Ø9,52	3 x Ø9,52	4 x Ø9,52	4 x Ø9,52	5 x Ø9,52