

# AZURI DC INVERTER

## ZIDNI KLIMA UREĐAJI

### SUPRA

#### STANDARDNO UKLJUČENO

- Wi-Fi sučelje
- Led display
- 7 brzina ventilatora
- Noćni način rada (3 noćne krivulje)
- I-Feel funkcija
- Cold Plasma filter za ioniziranje zraka
- Inteligentno predzagrijavanje i odmrzavanje
- Samodijagnoza
- Grijač vanjske jedinice




-25°C ~ 30°C

-15°C ~ 43°C


**R32**

MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WO25VG/I	2700	3000	7,5 / 4,2	294 / 889 / 212
AZI-WO25VG/O	(800-3800)	(900-4250)	A++ / A+	555 / 732 / 330
AZI-WO35VG/I	3510	3810	7,1 / 4,1	294 / 889 / 212
AZI-WO35VG/O	(900-4400)	(900-4700)	A++ / A+	555 / 732 / 330
AZI-WO50VG/I	5200	5600	7,1 / 4,2	307 / 1013 / 221
AZI-WO50VG/O	(1000-6100)	(1100-6600)	A++ / A+	555 / 802 / 350

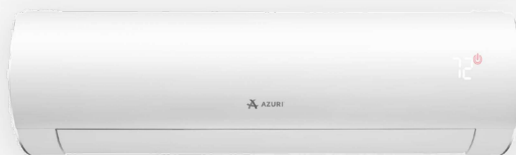

MODEL	UČINAK (W)		SEER / SCOP ENER. KLASA	DIMENZIJE V / Š / D (mm)
	HLADENJE	GRIJANJE		
AZI-WO25VB/I	2700	3000	7,5 / 4,2	294 / 889 / 212
AZI-WO25VB/O	(800-3800)	(900-4250)	A++ / A+	555 / 732 / 330
AZI-WO35VB/I	3510	3810	7,1 / 4,1	294 / 889 / 212
AZI-WO35VB/O	(900-4400)	(900-4700)	A++ / A+	555 / 732 / 330
AZI-WO50VB/I	5200	5600	7,1 / 4,2	307 / 1013 / 221
AZI-WO50VB/O	(1000-6100)	(1100-6600)	A++ / A+	555 / 802 / 350



CJEVOVOD	UČINAK (kW)		
	2,7	3,51	5,2
Max. visinska razlika [m]	10	10	10
Max. dužina instalacije [m]	15	15	25
Promjer cijevi tekuće faze [mm]	6,35	6,35	6,35
Promjer cijevi plinovite faze [mm]	9,52	9,52	12,7