Features


High-Efficiency

All DC Inverter Technology



DC twin-rotary compressor

A high-efficiency 2-cylinder rotary compressor with a DC inverter optimizes the internal structure of the compressor to achieve higher energy efficiency compared to similar compressors.



DC fan motor

The DC fan motor produces high power, a wide operating range, and high-efficiency.



Sine-wave DC inverter control

High-efficiency operation is realized by using sine-wave DC inverter control.




Heat Exchanger for Wall-mounted type

High-density multipath heat exchanger

Thinner and denser heat exchangers and multipath efficiency technology have substantially improved heat exchange performance.

High-performance sub-cool heat exchanger


A counter-type bypass circuit has been incorporated to achieve a higher performance. (Large multi-split type. VRF)



High Energy Saving


Occupancy sensor control

The Occupancy sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.




Economy operation

Limits maximum operation, reducing the power consumption, and thereby suppressing the maximum load.




Setting temperature range limitation

The minimum and maximum temperature range can be set giving further energy savings while considering the comfort of the occupants.




Set temperature auto return

- The set temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is from 10 to 120 minutes.



Auto-off timer

- The indoor unit is automatically turned off when it reaches a preset operating time frame.
- The time frame of the Auto-off timer can be flexibly scheduled.
- Auto-off times can be set from 30 to 240 minutes.






More Comfort




Power diffuser

These three technologies enable precise wind direction control and improve ventilation efficiency; our airflow control offers a more comfortable environment.




Wireless LAN control

Users can control their air conditioners from anywhere with their mobile devices while out or on the move.

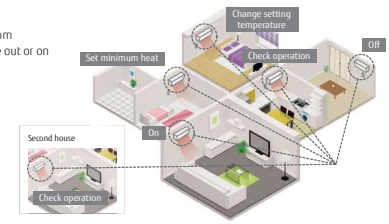


Powerful operation

Maximum airflow and maximum compressor speed are maintained for the period necessary to reach the set temperature quickly.



10°C heat

After a person has left the room, the system switches to minimum heating operation to maintain the room temperature. (Maintained at 10°C)





Uniform air conditioning

Circular airflow to achieve uniform air conditioning without temperature unevenness in workspaces






Quiet and Comfort Control

Low Noise Technology


Outdoor unit fan

Outdoor unit fan design with a small separation vortex, minimized air volume by fan control, and top-class low noise




Air stabilizer in Duct

Low-noise duct structure with a built-in air stabilizer




Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. Operation time can be set by timer.



Auto changeover

In an auto setting, the system automatically switches between cooling and heating modes according to the set temperature and room temperature.



Fresh air intake for Cassette, Duct, Ceiling

Fresh air is taken in by a fan connected to an external control unit.



Fresh air intake kit

Feature Explanation

Energy-Saving Features

Save Occupancy sensor
The Occupancy sensor detects the movement of people in the room and determines whether to switch to energy saving operation.

Occupancy sensor control
The Occupancy sensor (option) detects movement of people in the room and decides whether to save energy or stop the unit.

Economy operation
The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

Setting temperature range limitation
Sets the minimum and maximum limits on room temperature to establish the right balance between energy saving and a comfortable environment.

Set temperature auto return
The setting temperature automatically returns to the previously set temperature.

Features for Comfort

Power diffuser
An additional louver that opens based on input from monitoring sensors to quickly enhance immediate comfort needs.

Powerful operation
Operation at maximum air flow and compressor speed, that quickly makes the room comfortable.

10°C Heat
The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

Outdoor unit low noise operation
The noise level of the outdoor unit can be selected.

Auto changeover
The unit automatically switches between heating and cooling modes based on the temperature setting and the room temperature.

UP/DOWN swing louver
The vertical louver automatically swings up and down.

Double swing automatic
Complex swing action of the louver enables automatic swing in both the left/right and up/down directions.

Automatic fan speed
A micro-computer automatically adjusts the airflow to follow the changes in room temperature.

Auto restart
In the event of a temporary power failure, the air conditioner will automatically restart in the same operating mode as before, once the power supply is restored.

Connectable fresh air duct
Outside air can be introduced by attaching a locally purchased duct to the fresh air knockout and an optional part.

Fresh air intake
Fresh air can be taken in by a fan connected to an external control unit.

Connectable distributing duct
Locally purchased branch ducts can be attached to the systems to distribute the airflow.

Individual airflow direction control
Each louver of a 4-way Cassette type can be controlled individually to provide comfortable airflow.

Convenience Features

Auto-off timer
Automatically stops operation when a fixed time has elapsed from the start of operation.

Sleep timer
A micro-computer gradually changes the room temperature automatically to promote a comfortable night's sleep.

Program timer
This digital timer allows selection of one of four options: ON, OFF, ON → OFF, or OFF → ON.

Weekly timer
Different ON-OFF times can be set for each day.

Weekly & Temperature setback timer
Weekly & Temperature setback timer can set the temperature for 2-time spans and for each day of the week.

Filter sign
Indicates the filter cleaning period by blinking.

External error output

External ON/OFF input
Special Cooling
Special Cooling* is a function that supports the operation of "Multi System Control".

Wireless LAN control
The optional WLAN adapter enables the air conditioner to be operated by smartphone or tablet PC from outside the home.

Multi System Control
Operation using "Lead Lag Operation", "Back-up operation", "Lag Operation" is possible. (Page C-011)

Clean Features

Ion deodorization filter
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by an ultra-fine-particle ceramic.

Apple-catechin filter
The Apple-catechin filter uses static electricity to clean fine particles and dust from the air.

Long-life filter

Washable panel
Since the front panel is easy to remove, maintenance is also easy.

Silver Ion Filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

Installation / Support

Automatic airflow adjustment
Automatically detects required airflow in each application case and adjusts the volume.

Drain pump as standard

Blue fin

Refrigerant cycle monitor
The values of each sensor and actuator can be displayed, and the status of the refrigeration cycle can be checked.

All DC models

NEW

Wall-mounted type

Built-in W-LAN adapter model
Standard Series
High-Efficiency & Comfort



R32

GOOD DESIGN


ALL DC

Economy | Powerful | 10°C HEAT | Low Noise | Auto Clean | Ozonizer | Up/Down | Airfree | Restart | Silent | Program | Filter | LAN | ION | Air | Washable

Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.

Hybrid-heat exchanger





High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.

Rank *1
Cooling A++
Heating A+

SEER 7.4 *1
SCOP 4.4 *2

*1: 07/09 models
*2: 12 model

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



20 dB(A)
Cooling only

Smart device control

With the WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.


You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.

AIRSTAGE Mobile



Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.



Model: ASYG07KMCF/ASYG09KMCF/ASYG12KMCF/ASYG14KMCF




WLAN adapter


Wireless RC


For ASYG07/09/12KMCF


For ASYG14KMCF

Specifications

Model name	Indoor unit			ASYG07KMCF	ASYG09KMCF	ASYG12KMCF	ASYG14KMCF
	Outdoor unit			AOYG07KMCC	AOYG09KMCC	AOYG12KMCC	AOYG14KMCC
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling		kW	2.0 (0.9-3.0)	2.5 (0.9-3.2)	3.4 (0.9-3.9)	4.2 (0.9-4.4)
	Heating			2.5 (0.9-3.4)	2.8 (0.9-4.0)	4.0 (0.9-5.3)	5.4 (0.9-6.0)
Input Power	Cooling/Heating		kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling		W/W	4.43	3.97	3.65	3.44
COP	Heating			4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	7.40	7.40	7.30	6.90
SCOP	Heating (Average)			4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling			A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling		kWh/a	95	118	163	213
	Heating			785	819	795	1,366
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
	Outdoor (Cooling/Heating)	High		46/46	46/46	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High		54/56	55/57	55/58	57/59
	Outdoor (Cooling/Heating)	High		61/61	61/62	65/65	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	m^3/h	650/1,650	700/1,650	700/1,700	770/1,680
	Indoor/Outdoor (Heating)	High		720/1,450	750/1,450	780/1,470	820/1,580
Net Dimensions H x W x D	Indoor		mm	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222
	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
Weight	Indoor		kg (lbs)	10 (22)	10 (22)	10 (22)	10 (22)
	Outdoor		kg (lbs)	22 (49)	22 (49)	24 (53)	31 (68)
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15	15
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge		kg (CO2eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)

Optional parts

* For optional parts compatibility of Intesis devices, refer to the optional parts compatibility list Page C-048.

Compact wired remote controller:	UTY-RCRYZ1	Communication kit:	UTY-TWRXZ2	Network Convertor for single split (DC power supply type):	UTY-VTGX
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB:	UTY-XCSXZ2	Network Convertor for single split (AC power supply type):	UTY-VTGXV
Wired remote controller:	UTY-RLRY	External connect kit:	UTY-XWZX	Silver Ion filter:	UTR-FA16-5
Simple remote controller (without operation mode):	UTY-RHRY		UTY-XWZX25		
Simple remote controller:	UTY-RSRY	External switch controller:	UTY-TERX		

Dimensions

(Unit: mm)

